

WXS Super Radius do 65 HRc in super visoke pomike

PROMOCIJA

WXS-HS-CRE



WXS-CRE Z5

WXS-CRE




PROMOCIJA
popust **-55%** za
izvedbo testa WXS-CRE



Koda	d	R	l	l1	L	d1	d2	Cenik	TEST
									Promo cena
OSG48107467	6,0	R1,5	3	24	50	5,4	6	116,40	52,40
OSG48107489	8,0	R2,0	4	32	60	7,2	8	140,60	63,30
OSG48107509	10,0	R2,0	4	40	70	9,0	10	180,40	81,20
OSG48107533	12,0	R3,0	5	48	80	11,0	12	214,20	96,40



Koda	d	R	l	l1	L	d1	d2	Cenik	TEST
									Promo cena
OSG48106467	6,0	R1,5	3	12	90	5,4	6	131,30	59,10
OSG48106489	8,0	R2,0	4	16	100	7,2	8	158,60	71,40
OSG48106509	10,0	R2,0	4	20	100	9,0	10	203,60	91,60
OSG48106533	12,0	R3,0	5	24	110	11,0	12	241,70	108,80



WX-HS-CRE




Koda	d	R	l	l1	L	d1	d2	Cenik	TEST
									Promo cena
OSG3019867	6,0	R1,5	3	24	50	5,4	6	90,67	49,58
OSG3019889	8,0	R2,0	4	32	60	7,2	8	108,77	59,47
OSG3019909	10,0	R2,0	4	40	70	9,0	10	136,91	74,87
OSG3019933	12,0	R3,0	5	48	80	11,0	12	165,62	90,53

WX-CRE



Koda	d	R	l	l1	L	d1	d2	Cenik	TEST
									Promo cena
OSG8549421	2,0	R0,5	1	5	60	2	6	71,72	39,24
OSG8549433	3,0	R0,7	1	7,5	60	3	6	80,84	44,19
OSG8549445	4,0	R1,0	2	10	70	4	6	84,06	45,96
OSG8549457	5,0	R1,2	2	12,5	80	5	6	88,51	48,43
OSG8549467	6,0	R1,5	3	12	90	5	6	102,23	55,92
OSG8549477	7,0	R1,5	3	12	90	6	6	112,67	61,62
OSG8549489	8,0	R2,0	4	16	100	7	8	122,64	67,07
OSG8549499	9,0	R2,0	4	16	100	8	8	144,86	79,18
OSG8549509	10,0	R2,0	4	20	100	9	10	154,37	84,44
OSG8549519	11,0	R2,0	5	20	100	10	10	177,07	96,81
OSG8549533	12,0	R3,0	5	24	110	11	12	186,75	102,13
OSG8549543	13,0	R3,0	6	24	110	12	12	209,24	114,43

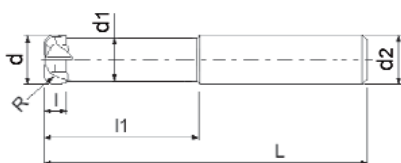

Označena "TEST Promo cena" velja za enkratno naročilo 2 kosa po poziciji.

> 60 -65 HRc

Pomik: 63m/min (3 500 mm/min)
Stroj: Vertikalni obd, center
Globina: ap = 3 mm - ae = 0,1 mm
Hlajenje: izpih z zrakom

pravilna oblika odrezkov

WXS-CRE d8 (180 min)

Orodje max. 50 HRc

Pomik 130m/min (10 000 mm/min)
Stroj: Vertikalni obd, center
Globina: ap = 3-4 mm - ae = 0,1 mm
Hlajenje: izpih z zrakom

Min. obraba (210 min)

WXS-CRE d8

> 60 -65 HRc

Pomik: 63m/min (3 500 mm/min)
Stroj: Vertikalni obd, center
Globina izvrtine: 20 mm
Hlajenje: izpih z zrakom

pravilna oblika odrezkov

WXS-CRE d6 (20 izvrtin)

30 (izvrtin)

WXS-CRE	~40 HRC	~45 HRC	~55 HRC	~60 HRC	~65 HRC	SUS ~35 HRC	GG-GGG ~350 HB	Cu	Al	Grafit	Ti	HRS	Plast.
	●	●	●	●	●		●						
WX-CRE	~40 HRC	~45 HRC	~55 HRC	~60 HRC	~65 HRC	SUS ~35 HRC	GG-GGG ~350 HB	Cu	Al	Grafit	Ti	HRS	Plast.
	●	●	●	●	○		●						

Cene so Akcijske brez DDV, ponudba velja do 30.3.2010, oz.do razprodaje zaloge.